

DECK-MOUNTED THERMAL CYCLER

We offer a compact, single-box deck-mounted thermal cycler that delivers fast, uniform, and reproducible thermal performance for seamless integration into automated workflows.



ABOUT OUR PRODUCT

Featuring our innovative patented thermoelectric control technology that delivers outstanding temperature stability with high power efficiency, V-BMB's Deck-mounted Thermal Cycler provides fast, consistent heating with superior temperature uniformity across every well, ensuring reliable and reproducible results for high-throughput automated workflows. It incorporates an independent multi-channel design that actively compensates for local thermal variations to ensure uniformity across the PCR plate.

Its compact, single-box architecture is enabled by an integrated, space-efficient TEC controller design that combines the thermal block and control electronics into one streamlined module. This minimizes deck footprint, simplifies installation, and frees valuable space on automated platforms. Designed for precise and stable heating and cooling, the system includes an adjustable heated lid and supports both low-profile and high-profile 96-well PCR plates.

With support for SiLA 2, direct command, or API-based control, the system offers flexible automation options to suit different user preferences. This enables seamless deployment across a wide range of liquid-handling platforms while supporting efficient, continuous PCR workflows.

Features

- Fast, uniform, and reproducible thermal performance across all wells
- Compact single-box design for minimal deck footprint and simplified installation
- Supports SiLA 2 / direct command / API
- Heated lid cover to prevent condensation
- Supports low-profile and high-profile 96-well PCR plates
- Four ventilation configurations: rear, down, left, and right
- Automated plate ejection for seamless integration with automated workflows



**Superior Temperature
Uniformity**



**Compact
Single-Box Design**




SiLA 2 Compatible



Specifications

	Deck-mounted Thermal Cycler VDTC302
Temperature Range	4 °C to 99 °C (39 °F to 210 °F)
Temperature Accuracy	±0.3 K @ 55 °C (131 °F)
Temperature Uniformity	±0.2 K @ 55 °C (131 °F) ±0.2 K @ 72 °C (162 °F) ±0.3 K @ 95 °C (203 °F)
Heating Rate Average (Slope)	Max. 4.4 K/s
Cooling Rate Average (Slope)	Max. 2.2 K/s
Adjustable heating & Cooling Rate	From 0.1 K/sec to 4.4 K/sec
Lid Temperature	Adjustable from ambient to 115 °C (239 °F)
Lid Default Temperature	110 °C (230 °F)
Plate Ejection	Automated plate ejection mechanism with exchangeable ejection bars
Ventilation Configurations	Rear (default), down, left, right
DC Input	36 - 48 VDC/ 1200 W (max)
PCR Plates	Low-profile and high-profile 96-well PCR plates
Max. Volume During PCR	100 µl/well for 96 well version
Operating Temperature Range	15 °C to 32 °C (59 °F to 90 °F)
Operating Humidity (Tolerable RH)	30 - 80%
Communication Interface	USB / RS-485 / RS-232
Dimensions & Weight	157.2 mm x 251 mm x 125 mm, 7.4 kg

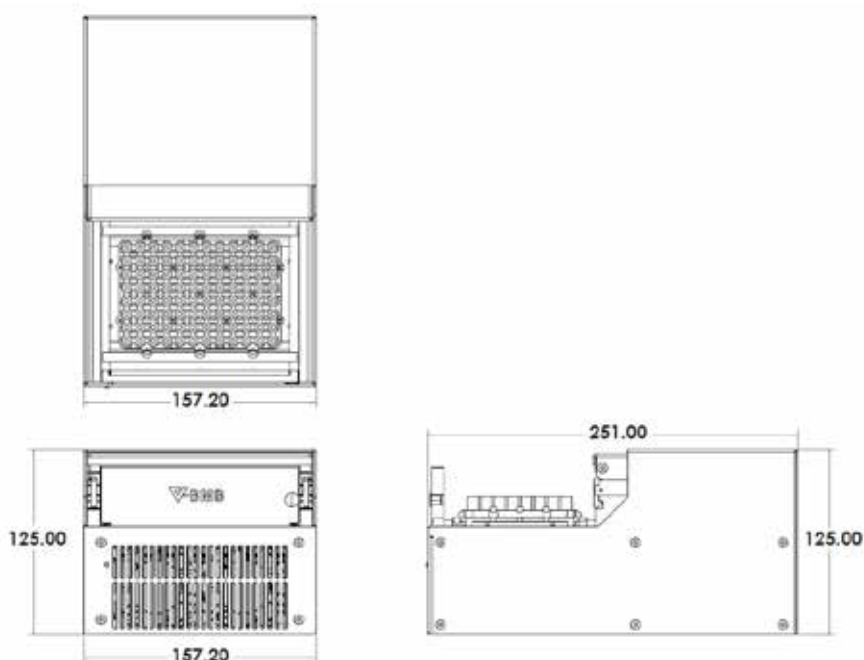

VBMB PTE LTD (V-BMB)

All product specifications are subject to change without notice. Last updated: MAY-2026
Copyright © 2026 VBMB Pte Ltd. All rights reserved.
No part of this document may be photocopied, reproduced, or translated to another language without the prior written permission of VBMB Pte Ltd.



Website: v-bmb.com
Email: sales@v-bmb.com
E-Shop: shop.v-bmb.com
LinkedIn: www.linkedin.com/company/v-bmb/