

VILLUMINATOR™

Top Hat Illumination Modules

We offer a range of high performance and innovative flat top illumination modules for the most demanding optical illumination applications.



VIL100X



VIL121X / VIL151X




VIL350X



Unrivalled
Uniformity



Versatile



Wide Wavelength
Selection

ABOUT OUR PRODUCT

Featuring our innovative patented flat-fielding technology, by using LEDs as incoherent light sources, Villuminators™ flat top illumination modules are compact long-lasting luminaires with many choices of wavelengths that provide uniform top hat illumination, making them ideal for a variety of applications, including fluorescence imaging, machine vision, projection, display, and more.

Features

- Superior Top Hat Uniformity (>95%)
- Versatile to fit many applications
- Wide Selection of wavelengths
- Long-lasting luminaires
- Customizable

Specifications

	VIL100X	VIL120X	VIL151X	VIL350X ⁵
Uniformity ¹	> 95%			
Flat Field Beam Diameter ²	Ø11mm	Ø13mm	Ø21mm	Ø35mm
Typical Optical Power	Up to 240mW	Up to 140mW	Up to 240mW	Up to 6W
Working Distance ³	11mm	16mm	19mm	23mm
Weight	90g	140g	150g	580g
Dimension, mm	Ø40, Length 50	Ø40, Length 71	Ø40, Length 77	W97 x D81 x H106
Max Current/Voltage	1.5A / 4V			27A / 5V
Cooling	Passive Heatsink			Active Fan
Accessories	LED Driver (VLD0201)	Field Aperture attachment (VIL-FA-1) ⁴ LED Driver (VLD0201)		LED Driver (VLD2501)

^{1, 2, 3, 4} Refer to page 2 for more information

⁵ Currently only offered with white LED and not for microscopy applications

VBMB PTE LTD (V-BMB)

All product specifications are subject to change without notice. Last updated: JUL-2026
Copyright © 2026 VBMB Pte Ltd. All rights reserved.
No part of this document may be photocopied, reproduced, or translated to another language without the prior written permission of VBMB Pte Ltd.




Website: v-bmb.com
Email: sales@v-bmb.com
E-Shop: shop.v-bmb.com
LinkedIn: www.linkedin.com/company/v-bmb/

Part Number and Ordering Information




Only for VIL120X and VIL151X modules


Identifier	Wavelength/Color	Identifier	Wavelength/Color
A	5700K (Cool White)	L	500 (Cyan)
B	4000K (Neutral White)	M	530 (Green)
C	2700K (Warm White)	N	554 (Lime)
D	365 (Ultra Violet)	O	590 (Amber)
E	385 (Ultra Violet)	P	615 (Red-Orange)
F	395 (Violet)	Q	630 (Red)
G	425 (Violet)	R	660 (Deep Red)
H	450 (Royal Blue)	S	730 (Far Red)
K	470 (Blue)	T	810 (Near-Infrared)

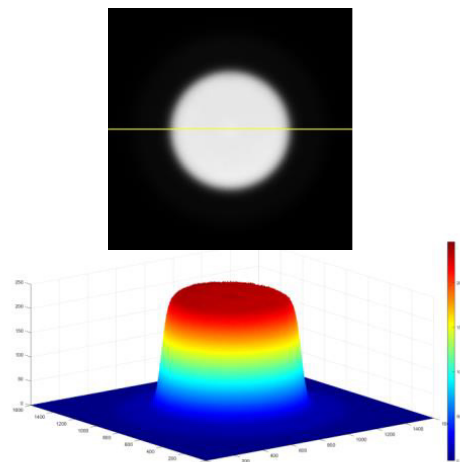

Typical Illumination Profile of VIL151X

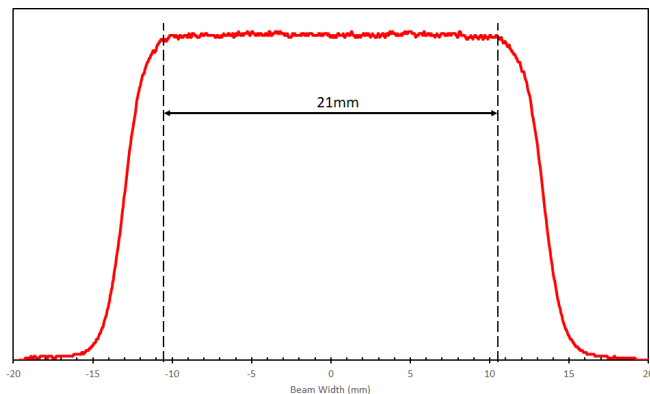


Definitions

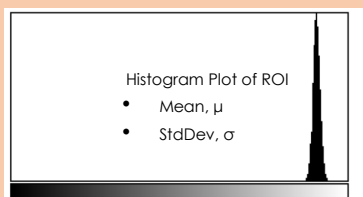


$$\text{ROI Uniformity}^1 = \frac{\text{Min}}{\text{Max}} \times 100\%$$

Note: Min/Max is $\text{Mean} \pm 2\sigma$ within the entire ROI, where σ is the standard deviation after noise correction

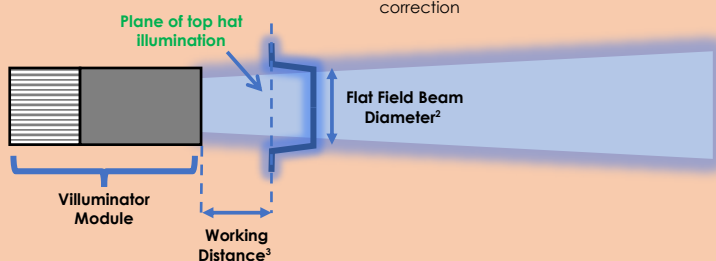

Accessories

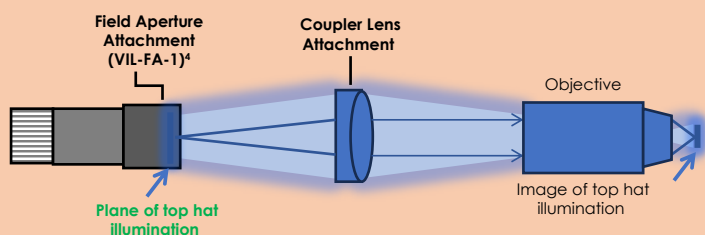


General example for microscopy

Applications

FLUORESCENCE MICROSCOPY

Only for VIL120X and VIL151X modules

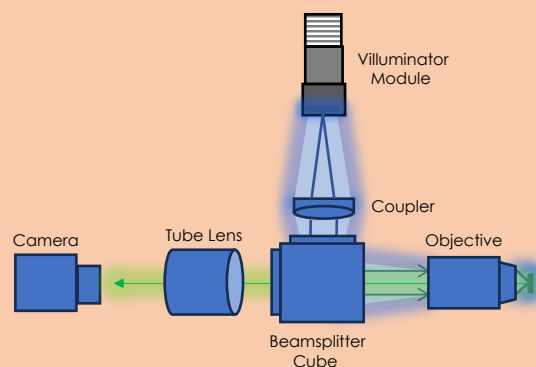

GENERAL PROJECTION

